
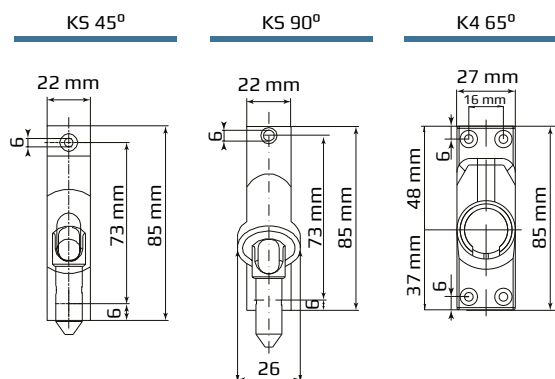
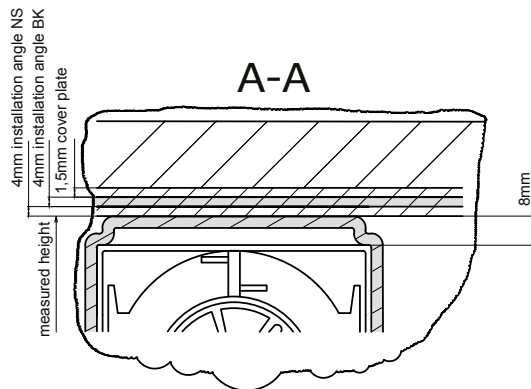
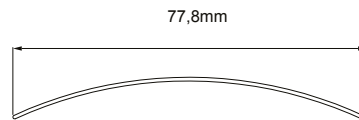


External Venetian Blind C-80F

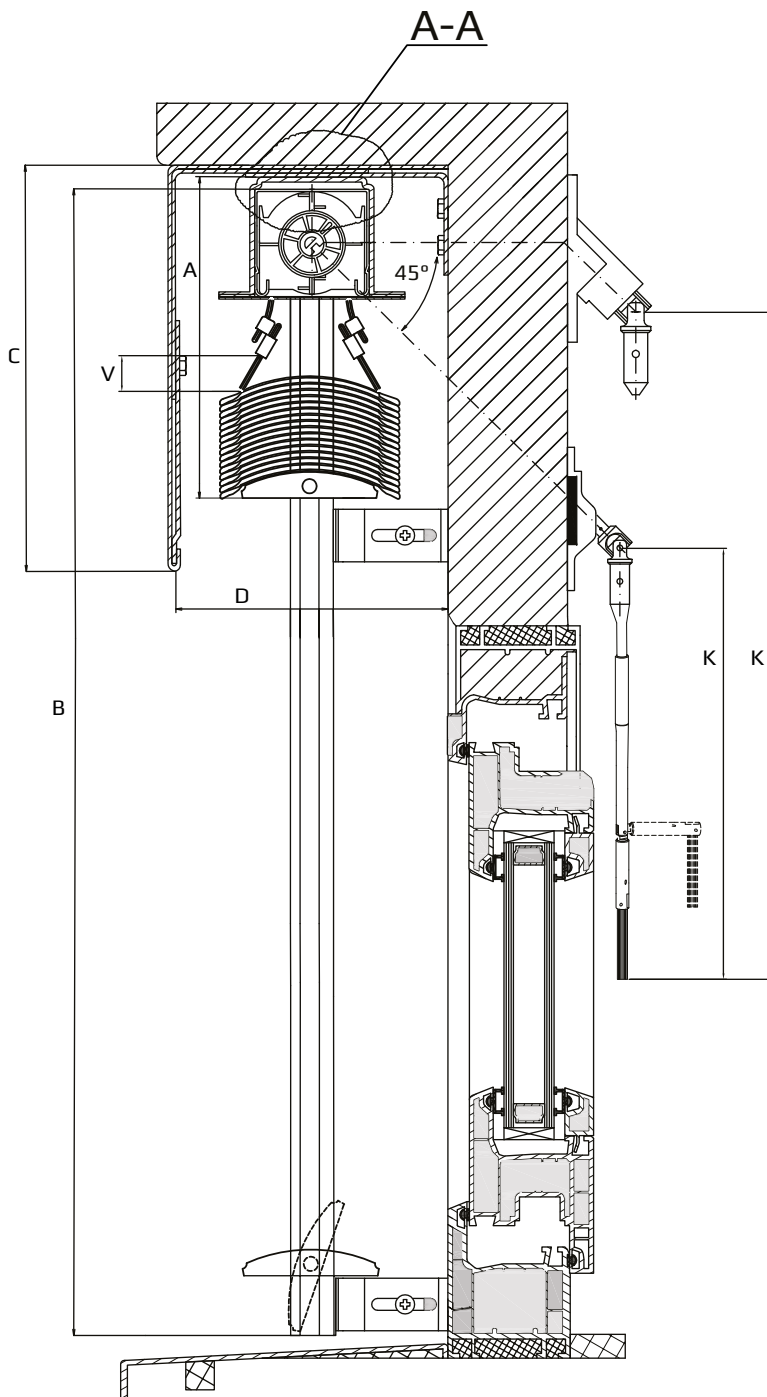


- A - Package height
- B - Total height of the blind
- C - Height of the cover plate
- D - Optimal depth: 130 mm,
Minimal depth: 120 mm
- V - Distance from first slat,
depending on the blind's height
- K - Length of the crank mechanism

The amount of tilters, depending on the dimensions of the external blind

width (mm) height (mm)	1200	1300	1400	2000	2200	2400	3000
2500	2	3	3	3	4	4	4
3000	2	3	3	3	4	4	4
4000	2	3	3	3	4	4	4

External Venetian Blind C-80F

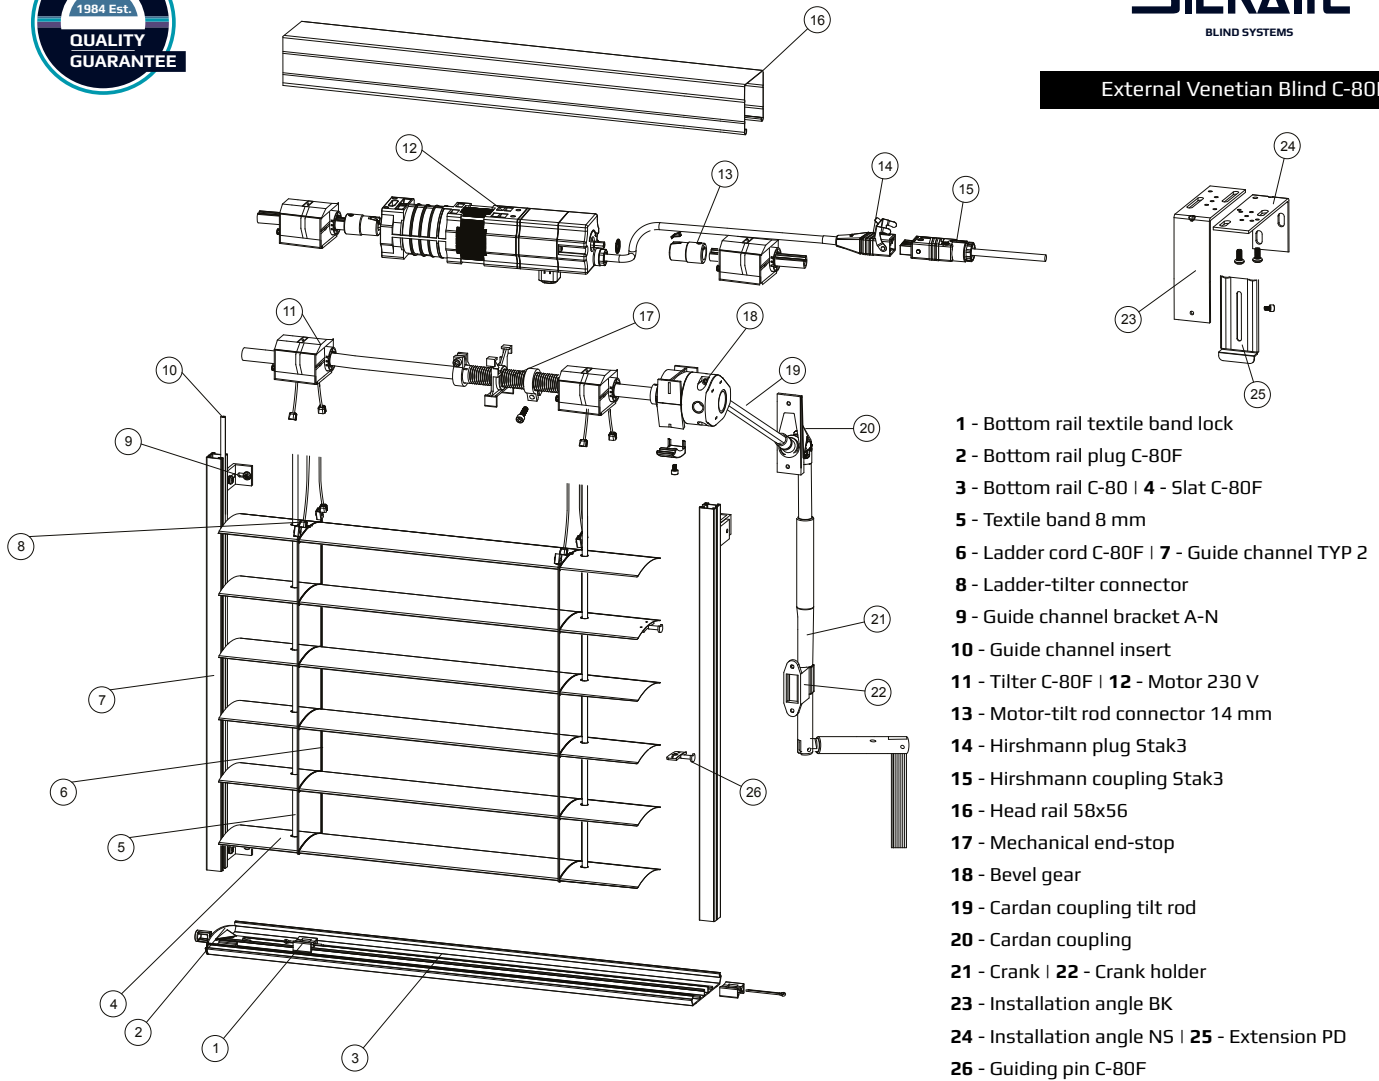

- 1 - Bottom rail textile band lock
- 2 - Bottom rail plug C-80F
- 3 - Bottom rail C-80 | 4 - Slat C-80F
- 5 - Textile band 8 mm
- 6 - Ladder cord C-80F | 7 - Guide channel TYP 2
- 8 - Ladder-tilter connector
- 9 - Guide channel bracket A-N
- 10 - Guide channel insert
- 11 - Tilter C-80F | 12 - Motor 230 V
- 13 - Motor-tilt rod connector 14 mm
- 14 - Hirshmann plug Stak3
- 15 - Hirshmann coupling Stak3
- 16 - Head rail 58x56
- 17 - Mechanical end-stop
- 18 - Bevel gear
- 19 - Cardan coupling tilt rod
- 20 - Cardan coupling
- 21 - Crank | 22 - Crank holder
- 23 - Installation angle BK
- 24 - Installation angle NS | 25 - Extension PD
- 26 - Guiding pin C-80F

min. width (manual)	min. width (motor)	max. width	max. height	max. surface (manual)	max. surface (motor)	max. surface of connected blinds (manual)	max. surface of connected blinds (motor)	Max. quantity of connected blinds (one motor)	Average weight of 1m ² : up to 7m ² surface	Average weight of 1m ² : above 7m ² surface
420 mm	500 mm	3500 mm	4000 mm	9 m ²	14 m ²	9 m ²	20 m ²	3 pcs	3 kg	2,7 kg

Quantity of guide channel brackets

Blind height	qty
500 - 1799	2
1800 - 3099	3
3100 - 4000	4

Quantity of headrail brackets

Blind width	qty
420 - 1699	2
1700 - 2699	3
2700 - 3399	4
3400 - 3500	5

Height of the packages C-80F

Total height of the blind	C-80F ARET 2		C-80F L (steel cord)		C-80F ARET 5	
	motor	manual	manual	motor	manual	motor
500 - 750	150	140	140	130	140	130
760 - 1000	160	150	150	140	150	140
1010 - 1250	170	160	160	150	160	150
1260 - 1500	180	170	170	160	170	160
1510 - 1750	180	170	170	160	170	160
1760 - 2000	190	180	180	170	180	170
2010 - 2250	190	180	190	180	190	180
2260 - 2500	190	180	190	180	190	180
2510 - 2750	200	190	190	180	190	180
2760 - 3000	200	190	200	190	200	190
3010 - 3250	210	200	200	190	200	190
3260 - 3500	220	210	210	200	210	200
3510 - 3750	230	220	220	210	220	210
3760 - 4000	240	230	230	220	230	220